
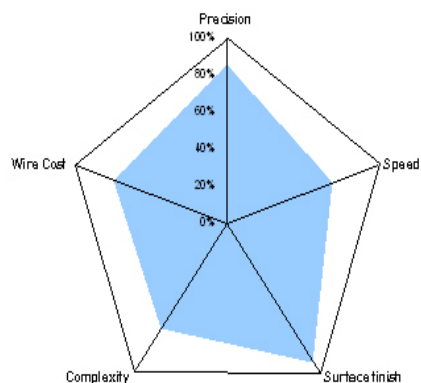


DRÁTY

AC CUT GV

High performance brass coated wire
with special alloy

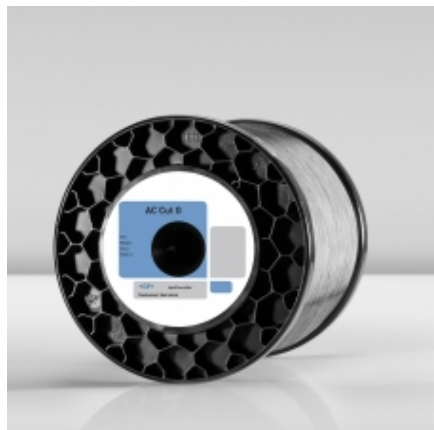

- AC CUT GV is the new generation of G wire. A wire that combine surface quality and precision with productivity
- Perfect surface homogeneity and fin surface roughness: Ra 0.12 μm in water and $< \text{Ra } 0.05 \mu\text{m}$ in oil
- Nejvyšší přesnost v detailech a rovinnosti obrobku
- Perfectly compatible with AC Cut A 900 and AC CUT G technologies
- AC Cut GV is recommended for top quality parts including punches and dies in steel or carbide

Specifikace

Povlak	Vodivost	Prodloužení	Materiál	Resistance
Special layer	22 % IACS	1 %	Mosaz CuZn37	900 N/mm ²

Balení

Objednací č.	Průměr drátu (mm)	Spool weight(kg)	Spool Type	Spool / Package
950-112-011	0.25	8	K160	2
950-112-006	0.20	8	K160	2
950-112-013	0.25	25	K250	1
950-112-007	0.20	16	K200	1
950-112-012	0.25	16	K200	1